

MONO MODULE **N** TYPE

610W-630W

Premium Quality *Bifacial Dual Glass*

132 CELL

MONO N-TYPE

23.32%

MAXIMUM EFFICIENCY

0 to +5W

POSITIVE POWER TOLERANCE



Higher Output of Power




For Environment For Future



Optimize the Temperature Coefficient



Reduce Equipment & Material Cost

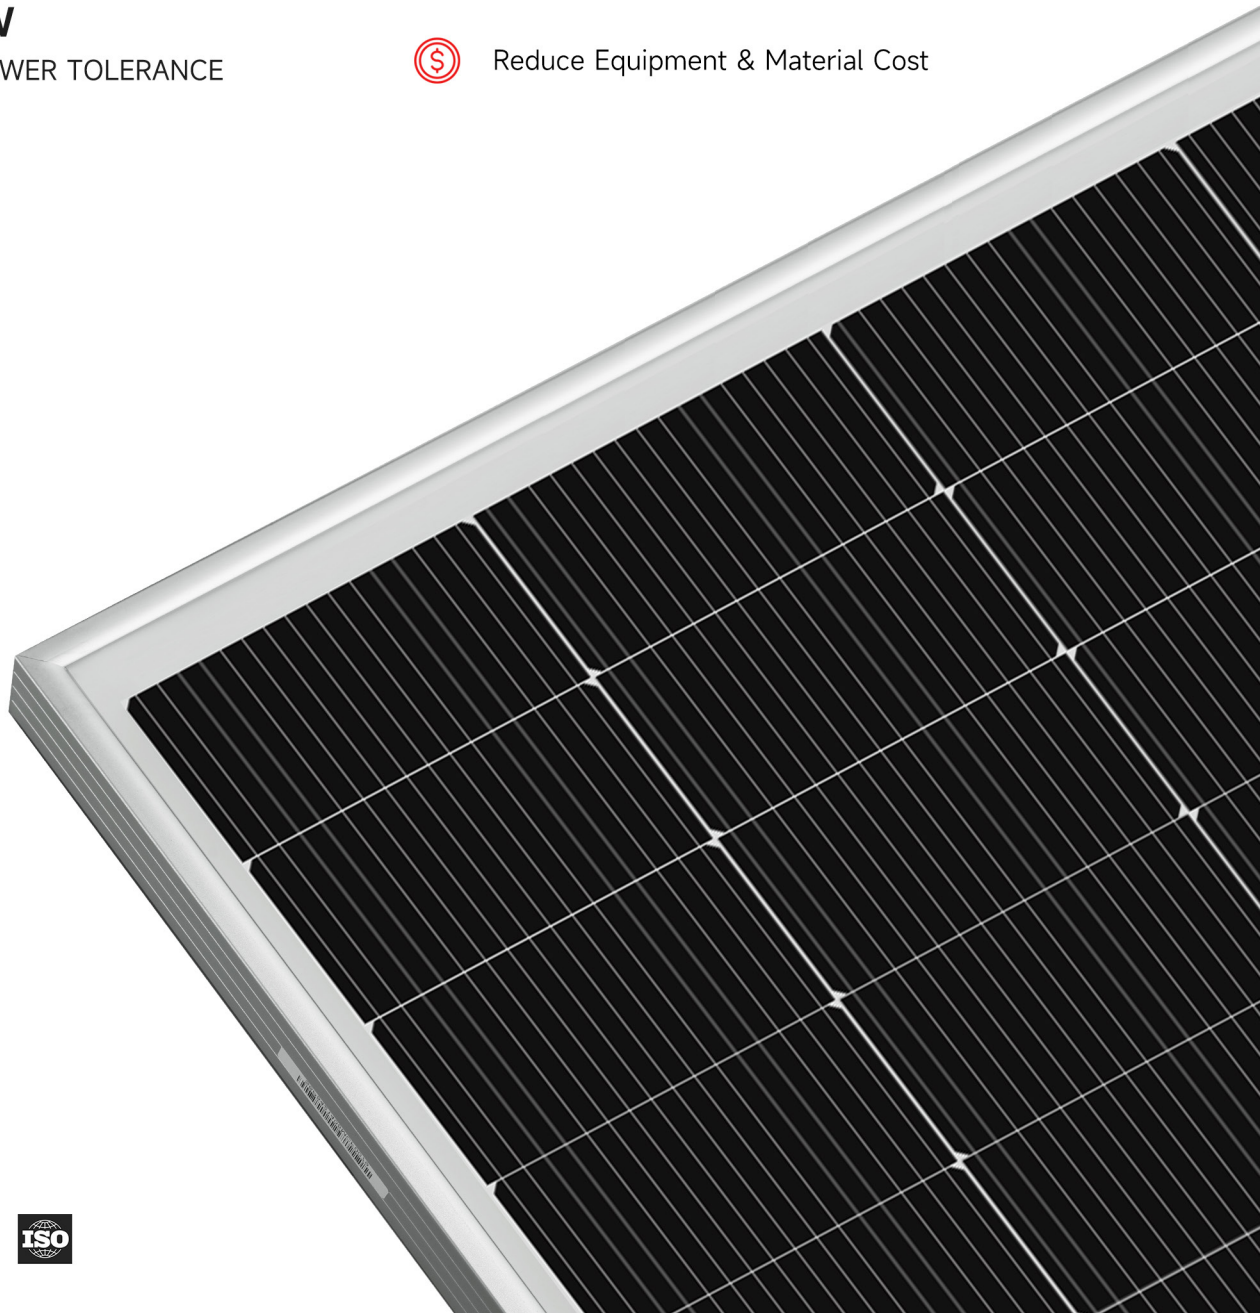


Module Type		PW-66M610HM10L-BD		PW-66M615HM10L-BD		PW-66M620HM10L-BD		PW-66M625HM10L-BD		PW-66M630HM10L-BD	
		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Test Environment		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power	$P_{MAX}(W)$	610	461	615	465	620	469	625	473	630	476
Maximum Power Voltage	$V_{MPP}(V)$	40.8	38.6	41.0	38.8	41.2	39.0	41.4	39.1	41.6	39.3
Maximum Power Current	$I_{MPP}(A)$	14.96	11.96	15.01	12.00	15.06	12.04	15.11	12.08	15.16	12.11
Open Circuit Voltage	$V_{OC}(V)$	48.0	45.4	48.2	45.6	48.4	45.8	48.6	46.0	48.8	46.2
Short Circuit Current	$I_{SC}(A)$	15.97	12.88	16.02	12.92	16.08	12.97	16.14	13.02	16.20	13.06
Tolerance	(W)	0 - +5		0 - +5		0 - +5		0 - +5		0 - +5	
Module Efficiency	(%)	22.58		22.77		22.95		23.14		23.32	

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3. Average efficiency reduction of 4.5% at 200W/m² according to EN 60904-1
 NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

BIFACIAL OUTPUT-REAR SIDE POWER GAIN 10% FOR REFERENCE



Module Type	PW-66M610HM10L-BD	PW-66M615HM10L-BD	PW-66M620HM10L-BD	PW-66M625HM10L-BD	PW-66M630HM10L-BD
Pmax (W)	671	676.5	682	687.5	693
Voc (V)	48	48.2	48.4	48.6	48.8
Isc (A)	17.37	17.43	17.49	17.54	17.60
Vmp (V)	40.8	41	41.2	41.4	41.6
Imp (A)	16.45	16.50	16.55	16.61	16.66

DIMENSIONS OF PV MODULE

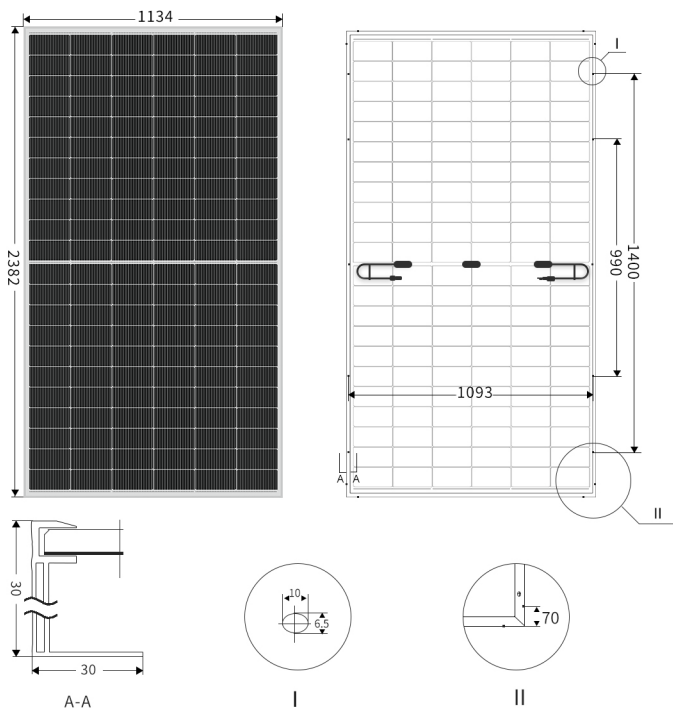

LINEAR PERFORMANCE WARRANTY

15 Year Product Warranty 30 Year Linear Power Warranty

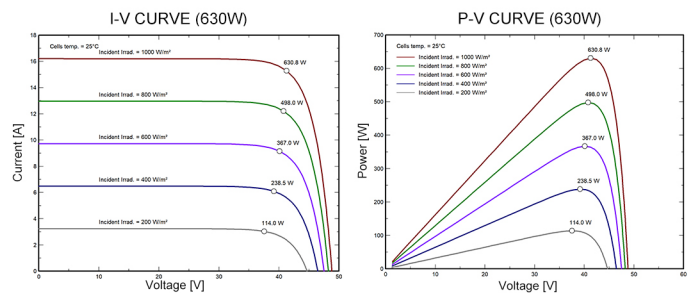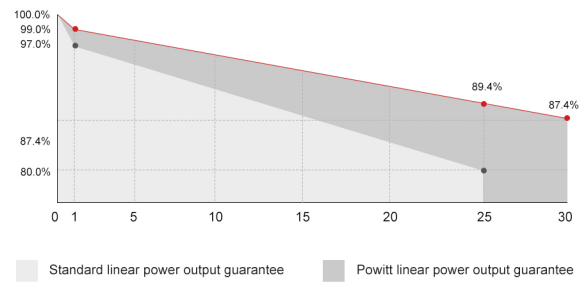

MECHANICAL DATA

Cell Type	Mono N-TYPE	TEMPERATURE RATINGS	Nominal Operating Cell Temperature(NOCT)	41±3°C
No. of Cells	132 (6 x 22)		Temperature Coefficient of P_{MAX}	-0.29%/°C
Module Dimensions	2382 x 1134 x 30mm		Temperature Coefficient of V_{OC}	-0.25%/°C
Weight	32.5kg		Temperature Coefficient of I_{SC}	+0.05%/°C
Front Glass	2.0mm	MAXIMUM RATINGS	Operational Temperature	-40°C to +85°C
Back Glass	2.0mm		Maximum System Voltage	1500V DC
Frame	Anodized Aluminium Alloy		Max Series Fuse Rating	35A
Junction Box	IP 68 Rated		Mechanical Load	5400pa
Cables	4.0mm ² , 350mm or Customized Length		Wind Load	2400pa
Connector	MC4 Compatible			

PACKAGING CONFIGURATION 37 pcs/Pallet, 740 pcs/40'HQ



Powitt Solar Co.,Ltd
 www.powitt.com
 info@powitt.com
 +86 519 8899 2132

All rights reserved. Specifications included in this datasheet are subject to change without notice.
 Version No. PWS202311V03